



GREENER BLAST
TECHNOLOGIES

MODEL SHOWCASE



Where Does Greener Blast Fit In The World Of Surface Preparation?

Wet abrasive technology incorporates three different elements. These include: H2O, compressed air, and an aggregate of choice all working as one. The Greener Blast, Inc. method of cleaning follows NACE/SSPC, Joint Surface Preparation Wet Abrasive Blasting standards (Referenced as WAB), "Use of an abrasive slurry under pressure to achieve the specified WAB degree of cleanliness" Item 1.1 Element 3.


Process


- I. Mix abrasive and water in pressure vessel.
- II. Hydraulically pressurize vessel with pneumatic water pump.
- III. Aggregate travels through system under hydraulic pressure and into compressed air stream.
- IV. Air stream carries aggregate down the blast hose and out of the nozzle propelling it to impact a desired surface.
- V. Minimal abrasive coupled with water result in maximum efficiency. As a result, each particle travels at a much higher velocity in the blast hose, before it is compressed in the nozzle, and propelled towards the substrate. This allows for optimum cleaning rates.

Greener Blast Advantage


- Up to 70-80% less abrasive consumption (100-250 lbs per hour)
- Minimal Dust
- Versatility of jobs
- Ability to utilize numerous different abrasives
- Maximum Portability
- Unmatched 24/7 Customer Support
- All machines fully hot dipped galvanized and Powder Coated
- Blast pressure adjustable from 30 PSI - 110 PSI

Have questions?

 | (855) 9GO-GBTI

 info@greenerblast.com

GBT 760

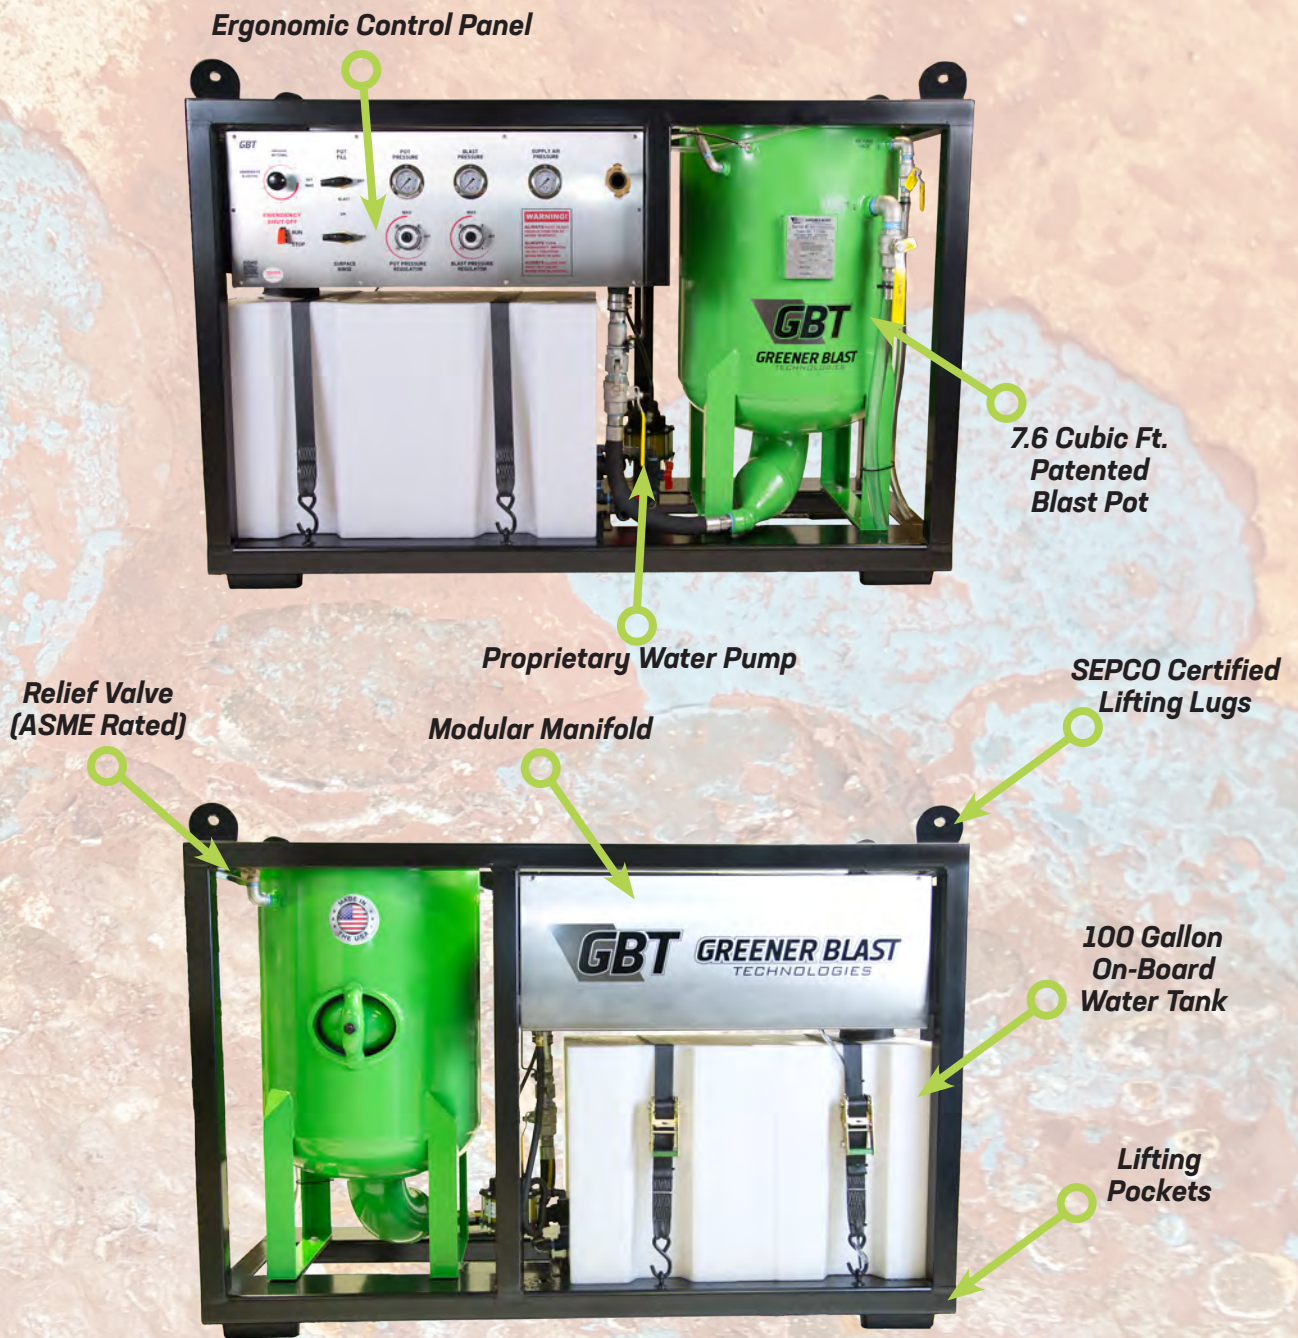

PACKAGE INCLUDES

50' 1-1/4" 2 Ply Lightweight Blast Hose
50' Twin Line (12 Volt Optional)
Deadman Switch
#8 XL Performance Nozzle

DIMENSIONS

78"L x 31"W x 55"H
Tare Wt: 1,030Lbs.
Gross Wt: 2,900Lbs.

FSU 1200

Ergonomic Control Panel



**12.0 Cubic Ft.
Patented
Blast Pot**

Proprietary Water Pump

**Relief Valve
(ASME Rated)**

Modular Manifold

Lifting Lugs



**100 Gallon
On-Board
Water Tank**

**Lifting
Pockets**

PACKAGE INCLUDES

50' 1-1/2" 4 Ply Blast Hose
50' 12 Volt Cable
12 Volt Deadman Switch
#10 XL Performance Nozzle

DIMENSIONS


84"L x 37"W x 55"H
Tare Wt.: 1,300Lbs
Gross Wt.: 3,500Lbs

Have questions?

☎ 1 (855) 9GO-GBT1

✉ info@greenerblast.com

GBT 350

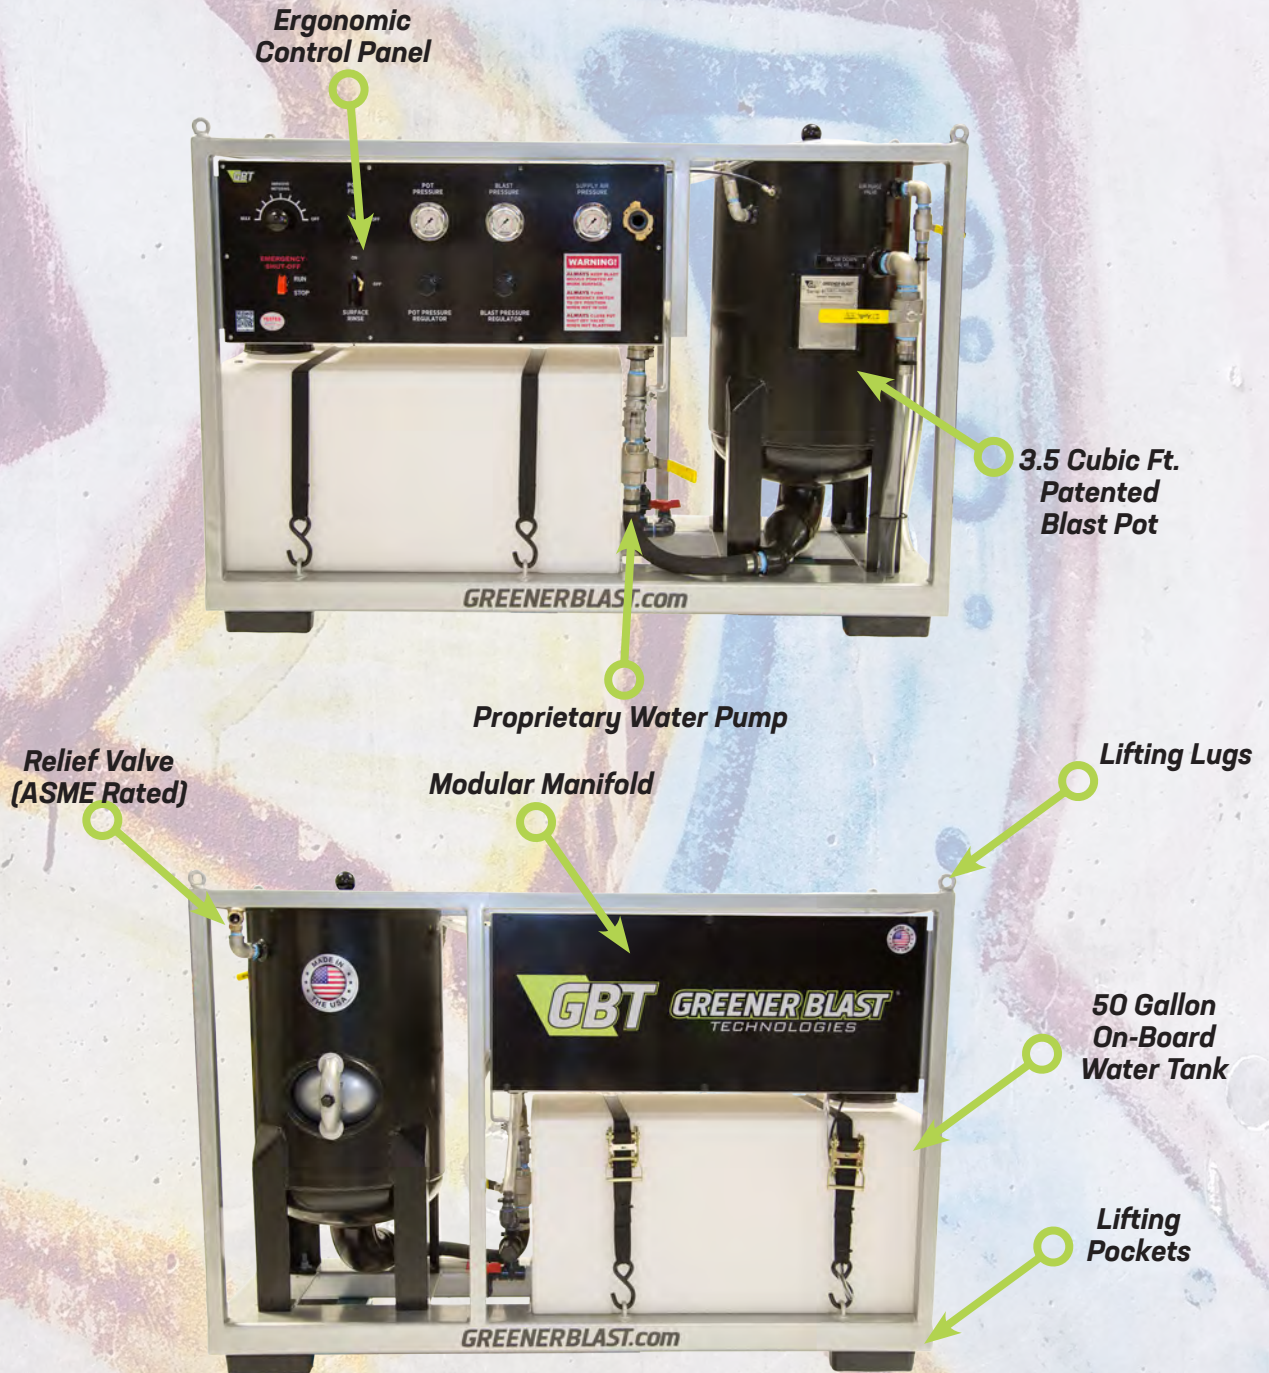

PACKAGE INCLUDES

50' 1" 2 Ply Lightweight Blast Hose
50' Twin Line
Deadman Switch
#6 XL Performance Nozzle

DIMENSIONS

63"L x 23"W x 44"H
Tare Wt: 750Lbs
Gross 1,650Lbs.

350 Skid Mount

**Ergonomic
Control Panel**

**15 Gallon
On-Board
Water Tank**

**Proprietary
Water Pump**

**3.5 Cubic Ft.
Patented
Blast Pot**

**Relief Valve
(ASME Rated)**

**Modular
Manifold**

**Lifting
Pockets**


PACKAGE INCLUDES


**50' 1" 2 Ply Blast Hose
50' Twin Line
Deadman Switch
#6 XL Performance Nozzle**

DIMENSIONS

**42"L x 22"W x 44"H
Tare Wt: 600Lbs.
Gross Wt: 1,200Lbs.**

Have questions?

 **1 (855) 9GO-GBT1**

 **info@greenerblast.com**

Dual Outlet



PACKAGE INCLUDES

- 2- 50' 1-1/4" 2 Ply Blast Hose
- 2- Twin Line
- 2- Deadman Switch
- 2- #8 XL Performance Nozzles

DIMENSIONS

- 62"L x 48"W x 56"H
- Tare Wt.: 1,800Lbs.
- Gross Wt.: 4,500Lbs.



GREENER BLAST
TECHNOLOGIES

Get in touch with
Greener Blast today

☎ 1 (855) 9GO-GBTI
✉ info@greenerblast.com
💻 greenerblast.com

**We are ready to help you pick the Greener Blast
machine that is just right for your company!**